

REALTECH

theGuard! Reporting



Performance Single Report

LMCCisco-2600

Reporting Period: 27.11.2006 00:00:00 - 28.11.2006 15:06:00



Reporting Criteria

Reporting Period: 27.11.2006 00:00:00 - 28.11.2006 15:06:00


Node: LMCCisco-2600

Utilization Overview

Device Port	Polling Interval	Utilization			Errors			Traffic
		Minimum	Maximum	Average	Minimum	Maximum	Average	
LMCCisco-2600,CISCO 2620 - Slot: 1, Port: 0	10 s	0.22 %	75.09 %	5.97 %	0 %	0.68 %	0 %	3.96 GB
LMCCisco-2600,CISCO 2620 - Slot: 1, Port: 0 In	10 s	0.28 %	95.25 %	6.26 %	0 %	1.36 %	0 %	2.08 GB
LMCCisco-2600,CISCO 2620 - Slot: 1, Port: 0 Out	10 s	0.11 %	94.98 %	5.67 %	0 %	0 %	0 %	1.88 GB
LMCCisco-2600,CISCO 2620 - WanPort	30 s	0.52 %	121.61 %	11.94 %	0 %	0.08 %	0 %	3.95 GB
Average of all items		0.28 %	96.73 %		0 %	0.53 %		
Minimum / maximum of all items		0.11 %	121.61 %		0 %	1.36 %		


Utilization for CISCO 2620 - Slot: 1, Port: 0

Utilization

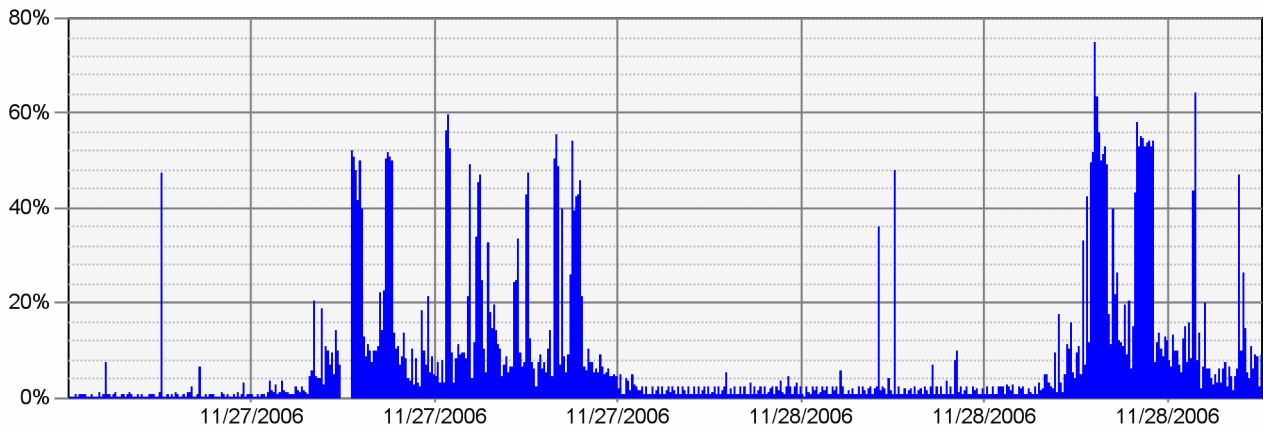


Average: 5.97 % Minimum: 0.22 % Maximum: 75.09 %

Errors

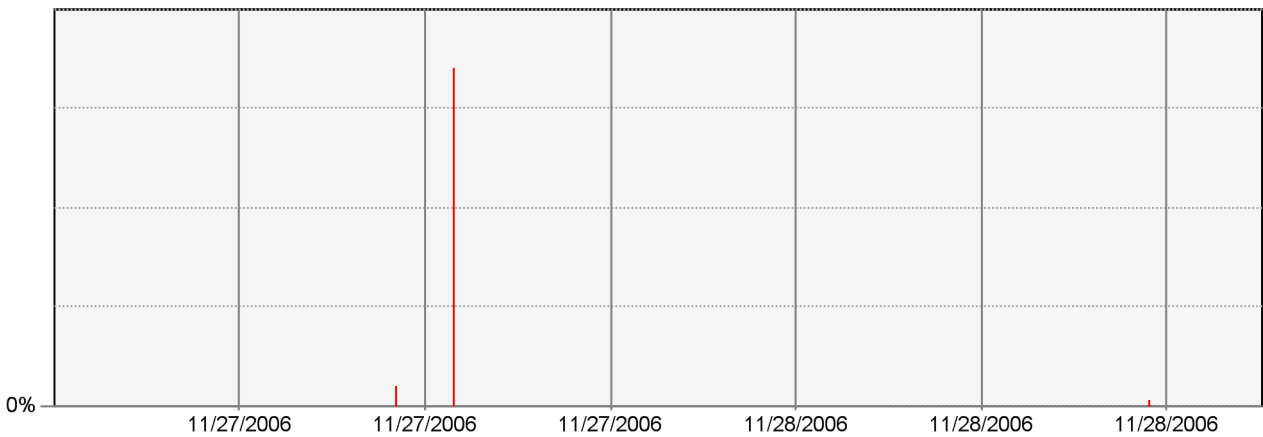

Average: 0 % Minimum: 0 % Maximum: 0.68 %

Capacity

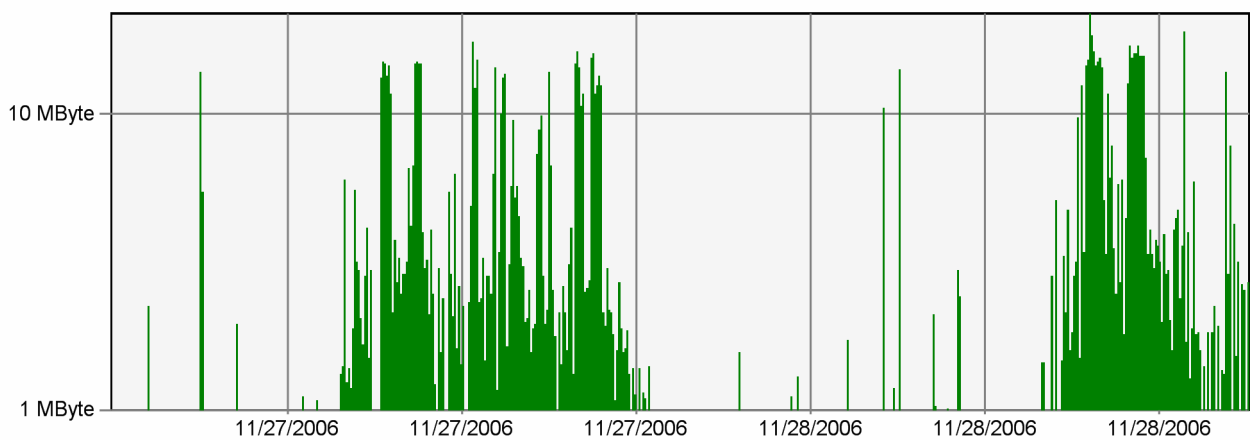


Average: 1.75 MByte Minimum: 64.48 KByte Maximum: 22 MByte




Utilization for CISCO 2620 - Slot: 1, Port: 0 In

Utilization

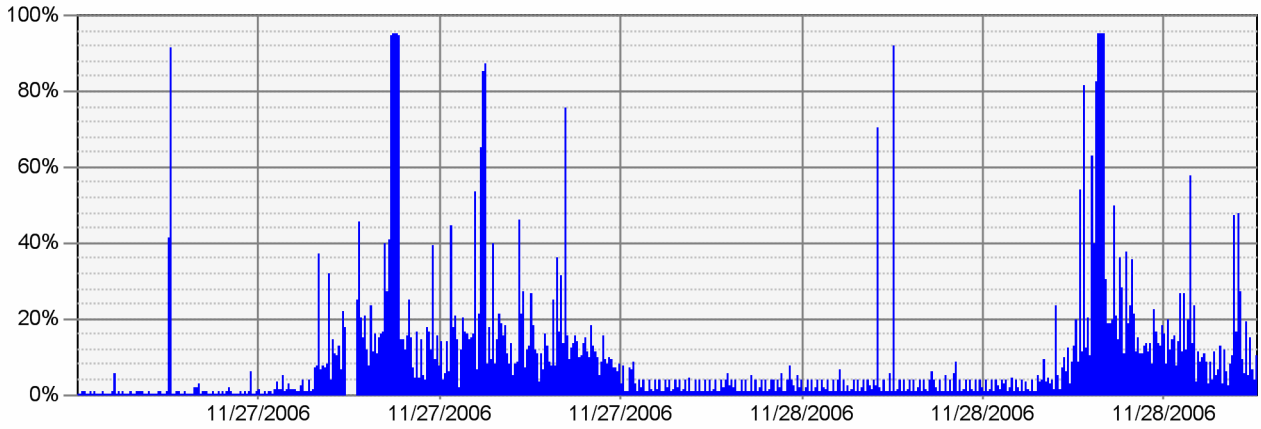


Average: 6.26 % Minimum: 0.28 % Maximum: 95.25 %

Errors

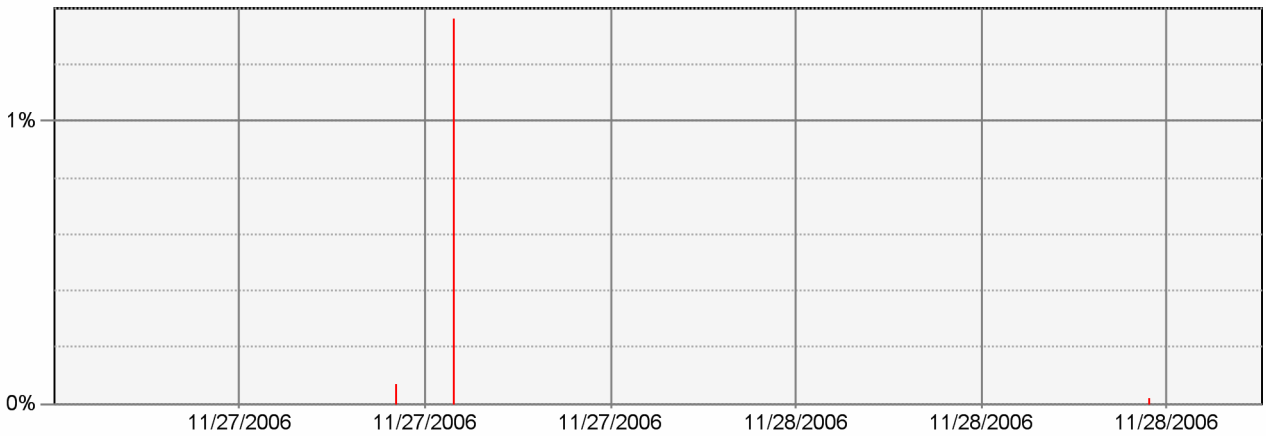

Average: 0 % Minimum: 0 % Maximum: 1.36 %


Capacity

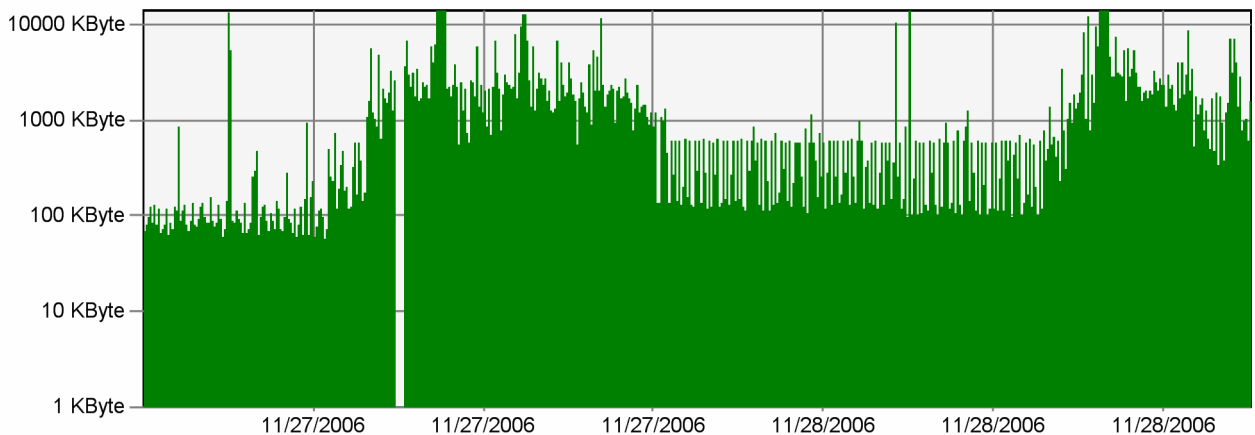

Average: 939.19 KByte Minimum: 41.83 KByte Maximum: 13.95 MByte


Utilization for CISCO 2620 - Slot: 1, Port: 0 Out

Utilization

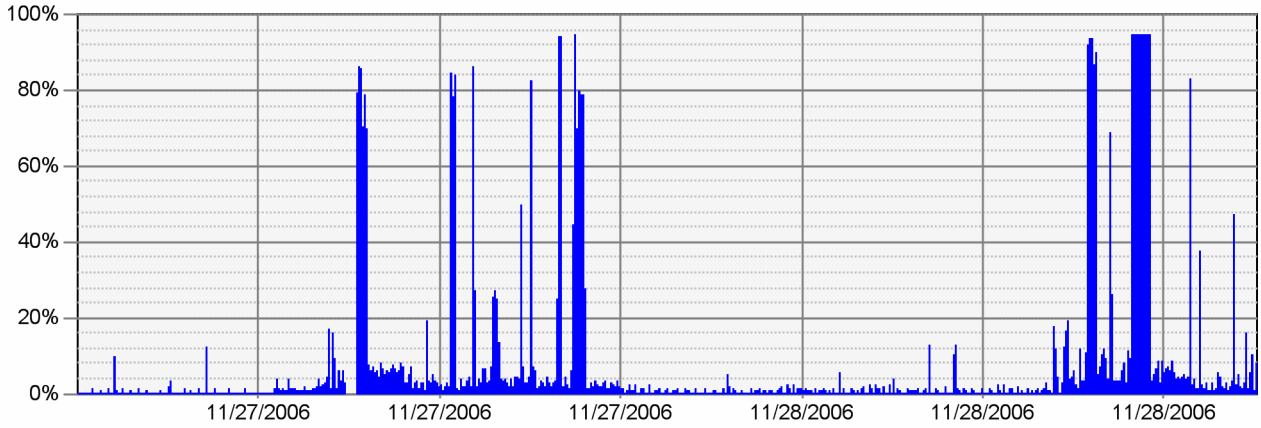


Average: 5.67 % Minimum: 0.11 % Maximum: 94.98 %

Errors

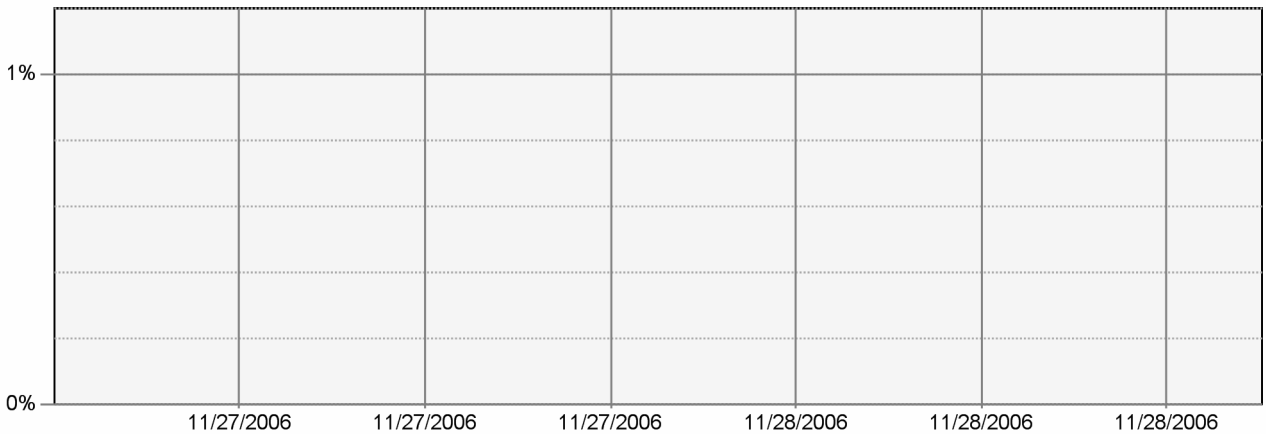

Average: 0 % Minimum: 0 % Maximum: 0 %

Capacity

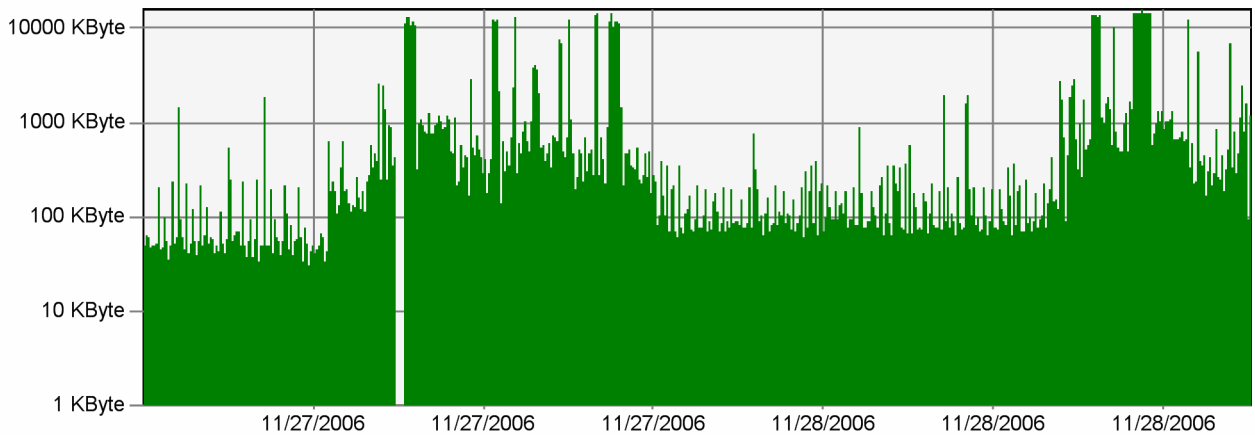


Average: 850.91 KByte Minimum: 16.16 KByte Maximum: 15.74 MByte




Utilization for CISCO 2620 - WanPort

Utilization

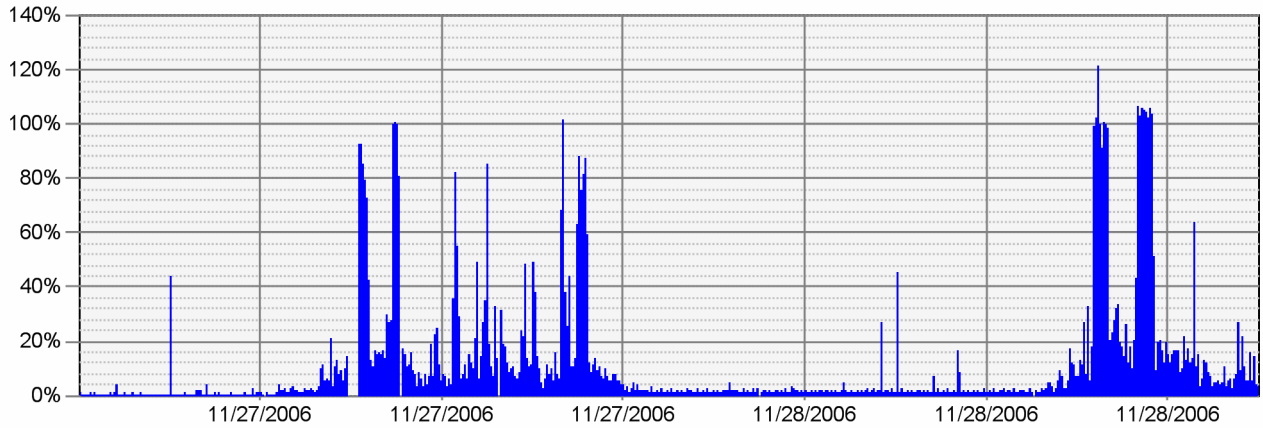


Average: 11.94 % Minimum: 0.52 % Maximum: 121.61 %

Errors

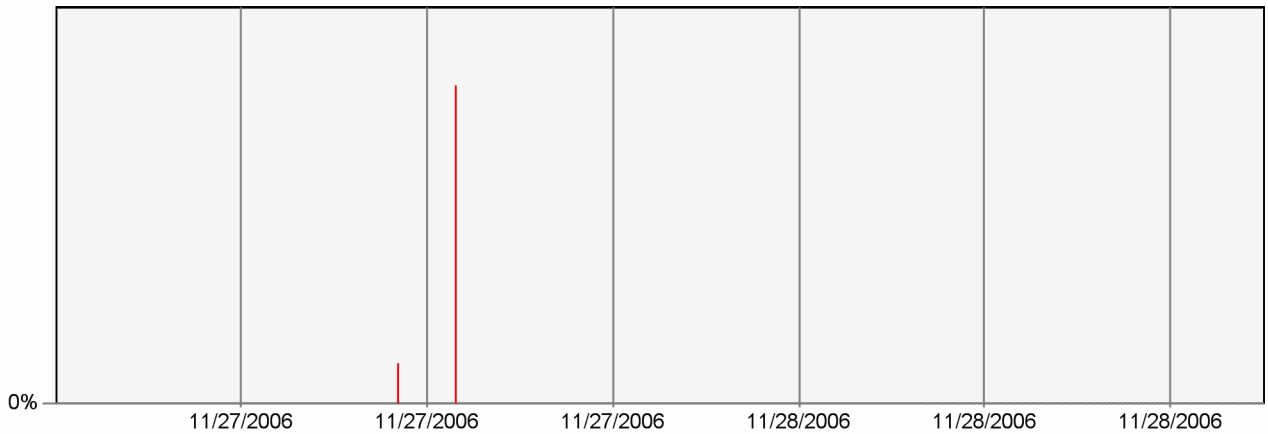

Average: 0 % Minimum: 0 % Maximum: 0.08 %

Capacity

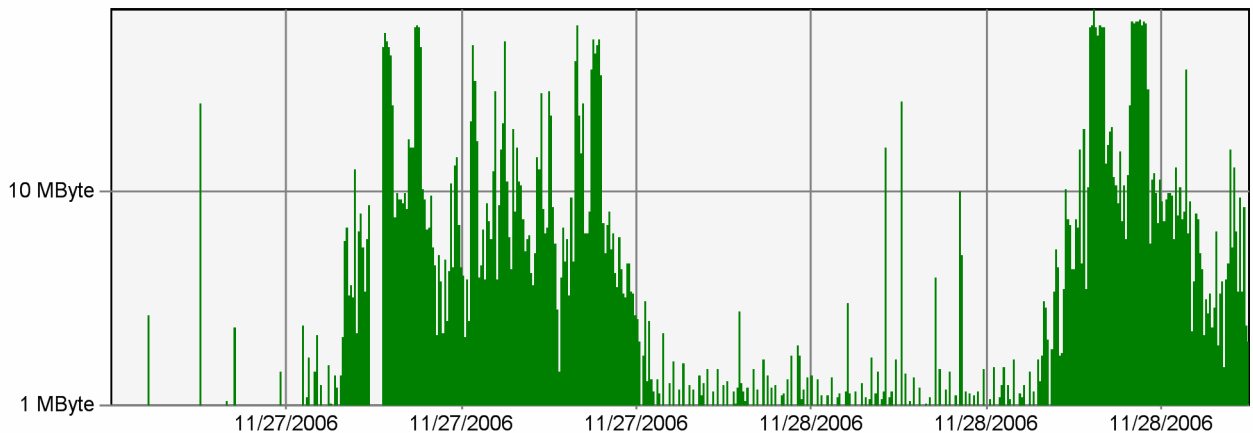


Average: 6.98 MByte Minimum: 314.33 KByte Maximum: 71.24 MByte



Additional Node Overview


Device Port	Polling	Values		
	Interval	Minimum	Maximum	Average
CISCO 2620 - CPU Stats busyPer	30	0	28	11.62
CISCO 2620 - CPU Stats avgBusy1	30	8	23	12.33
CISCO 2620 - CPU Stats avgBusy5	30	10	22	12.42
Average of all items		2	8.11	
Minimum / maximum of all items		0	28	

CISCO 2620 - CPU Stats busyPer

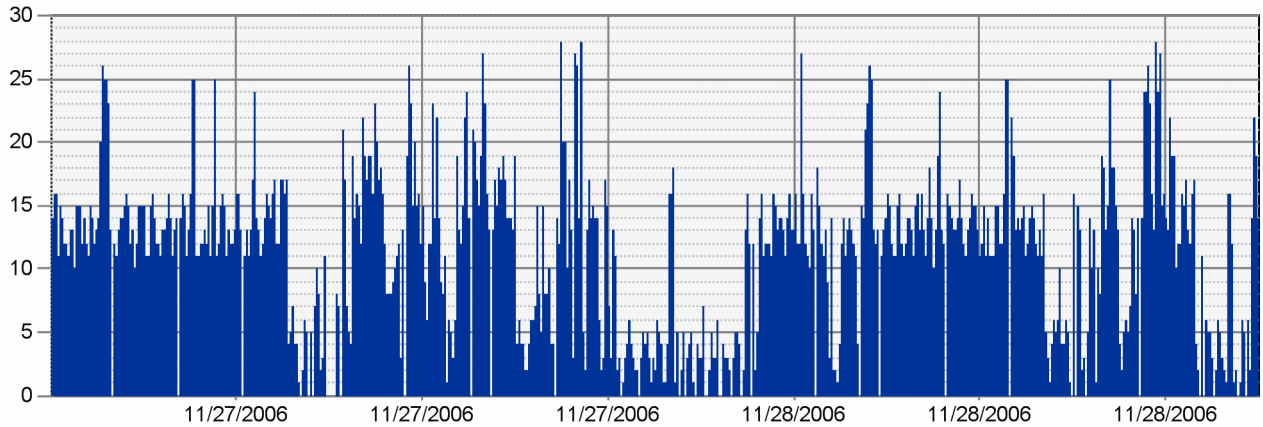


Average: 11.62 Minimum: 0 Maximum: 28

CISCO 2620 - CPU Stats avgBusy1

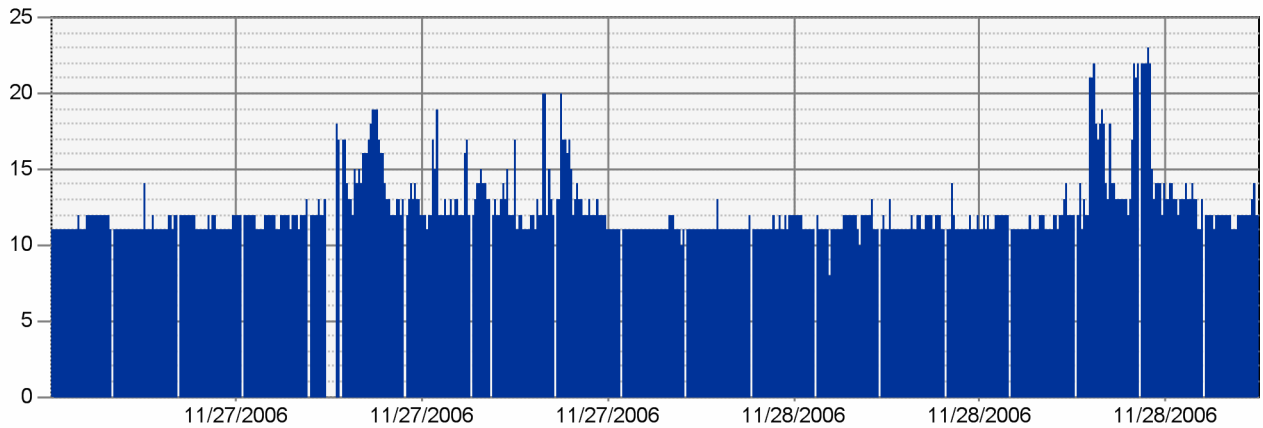

Average: 12.33 Minimum: 8 Maximum: 23

CISCO 2620 - CPU Stats avgBusy5

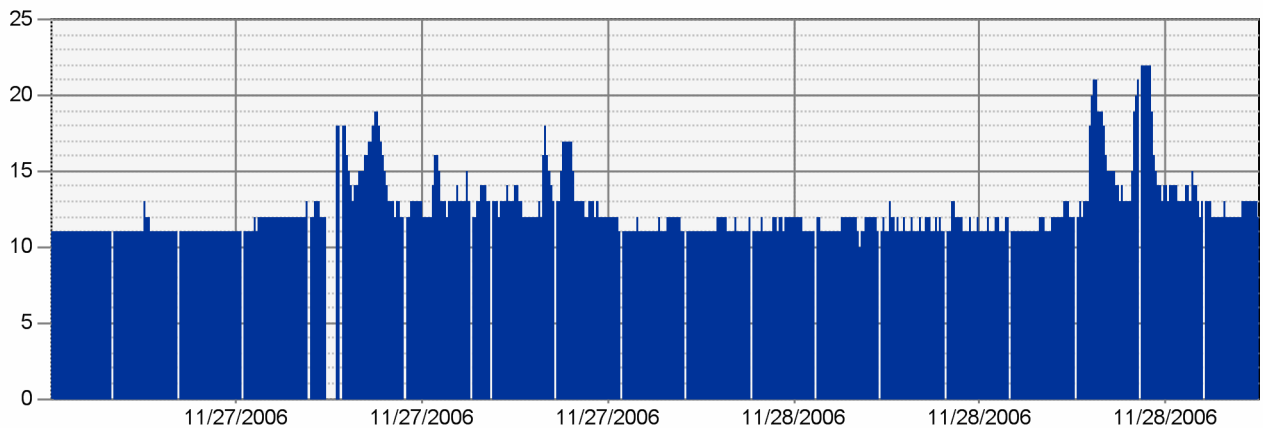

Average: 12.42 Minimum: 10 Maximum: 22